

GAM RUN 19-026: HAYS TRINITY GROUNDWATER CONSERVATION DISTRICT GROUNDWATER MANAGEMENT PLAN

Stephen R. Bond, P.G.
Texas Water Development Board
Groundwater Division
Groundwater Availability Modeling Department
512-475-1520
January 2, 2020

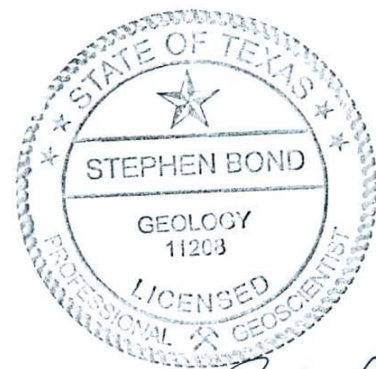

SRB

This page is intentionally blank.

GAM RUN 19-026: HAYS TRINITY GROUNDWATER CONSERVATION DISTRICT GROUNDWATER MANAGEMENT PLAN

Stephen R. Bond, P.G.
Texas Water Development Board
Groundwater Division
Groundwater Availability Modeling Department
512-475-1520
January 2, 2020

EXECUTIVE SUMMARY:

Texas State Water Code, Section 36.1071, Subsection (h) (Texas Water Code, 2011), states that, in developing its groundwater management plan, a groundwater conservation district shall use groundwater availability modeling information provided by the Executive Administrator of the Texas Water Development Board (TWDB) in conjunction with any available site-specific information provided by the district for review and comment to the Executive Administrator.

The TWDB provides data and information to the Hays Trinity Groundwater Conservation District in two parts. Part 1 is the Estimated Historical Water Use/State Water Plan dataset report, which will be provided to you separately by the TWDB Groundwater Technical Assistance Department. Please direct questions about the water data report to Mr. Stephen Allen at 512-463-7317 or stephen.allen@twdb.texas.gov. Part 2 is the required groundwater availability modeling information and this information includes:

1. the annual amount of recharge from precipitation, if any, to the groundwater resources within the district;
2. for each aquifer within the district, the annual volume of water that discharges from the aquifer to springs and any surface-water bodies, including lakes, streams, and rivers; and
3. the annual volume of flow into and out of the district within each aquifer and between aquifers in the district.

The groundwater management plan for the Hays Trinity Groundwater Conservation District should be adopted by the district on or before November 21, 2020 and submitted to the Executive Administrator of the TWDB on or before December 21, 2020. The current management plan for the Hays Trinity Groundwater Conservation District expires on February 19, 2021.

We used two groundwater availability models to estimate the management plan information for the aquifers within the Hays Trinity Groundwater Conservation District. Information for the Hickory Aquifer is from version 1.01 of the groundwater availability model for the minor aquifers in the Llano Uplift Region (Shi and others, 2016a and b). Information for the Trinity Aquifer is from the groundwater availability model for the Hill Country portion of the Trinity Aquifer System (Jones and others, 2011).

This report replaces the results of GAM Run 15-005 (Jones, 2015), as this report includes results for the Hickory Aquifer, whereas the previous report did not. The model does not cover the entire Hickory Aquifer within the district boundaries. Please contact Mr. Stephen Allen with the TWDB at (512) 463-7317 or stephen.allen@twdb.texas.gov for additional information on the aquifer in areas not covered by the groundwater availability model.

METHODS:

In accordance with the provisions of the Texas State Water Code, Section 36.1071, Subsection (h), the groundwater availability models mentioned above were used to estimate information for the Hays Trinity Groundwater Conservation District management plan. Water budgets were extracted for the historical model periods for the Hill Country portion of the Trinity Aquifer System (1981 through 1997) using ZONEBUDGET Version 3.01 (Harbaugh, 2009). Water budgets were extracted for the historical model period for the Hickory Aquifer (1981 through 2010) using ZONEBUDGET USG Version 1.00 (Panday and others, 2013). The average annual water budget values for recharge, surface-water outflow, inflow to the district, outflow from the district, and net inter-aquifer flow (lower) for the portion of the aquifer located within the district are summarized in this report.

PARAMETERS AND ASSUMPTIONS:

Hickory Aquifer

- We used version 1.01 of the groundwater availability model for the minor aquifers in the Llano Uplift Region to analyze the Hickory Aquifer. See Shi and others (2016a and b) for assumptions and limitations of the model.

- The groundwater availability model for the Llano Uplift Region contains eight active layers (from top to bottom):
 - Layer 1 — the Trinity Aquifer, Edwards-Trinity (Plateau) Aquifer, and younger alluvium deposits
 - Layer 2 — Permian and Pennsylvanian age confining units
 - Layer 3 — the Marble Falls Aquifer and equivalent
 - Layer 4 — Mississippian age confining units
 - Layer 5 — the Ellenburger-San Saba Aquifer and equivalent
 - Layer 6 — Cambrian age confining units
 - Layer 7 — the Hickory Aquifer and equivalent
 - Layer 8 — Precambrian age confining units
- The Hickory Aquifer is the only aquifer from the Llano Uplift Region present in the Hays Trinity Groundwater Conservation District.
- The groundwater availability model does not extend to the official boundary of the Hickory Aquifer within much of the district. The portion of the officially recognized Hickory Aquifer that is east of the Ouachita Thrust Fault is not active in the model because research suggests the fault likely acts as a flow barrier.
- The groundwater availability model contains active model cells that are outside of the official Hickory Aquifer boundary in the southwestern portion of the Hays Trinity Groundwater Conservation District. Lateral groundwater flow occurs from the model cells within the official aquifer boundary to these cells.
- Perennial rivers and reservoirs were simulated using the MODFLOW-USG river package. Springs were simulated using the MODFLOW-USG drain package. However, for this analysis, surface water discharge does not occur from the Hickory Aquifer within the groundwater district boundaries.
- The model was run with MODFLOW-USG (Panday and others, 2013).

Hill Country portion of the Trinity Aquifer System

- We used version 2.01 of the groundwater availability model for the Hill Country portion of the Trinity Aquifer System. See Jones and others (2011) for assumptions and limitations of the groundwater availability model.
- The groundwater availability model includes four layers, representing (from top to bottom):
 - Layer 1 — the Edwards Group of the Edwards-Trinity (Plateau) Aquifer,
 - Layer 2 — the Upper Trinity Aquifer,
 - Layer 3 — the Middle Trinity Aquifer, and
 - Layer 4 — the Lower Trinity Aquifer.
- Layer 1 is not present in the district. An individual water budget for the district was determined for the remaining layers of the Hill Country portion of the Trinity Aquifer System (Layer 2 to Layer 4, collectively).
- The General-Head Boundary (GHB) package of MODFLOW was used to represent flow out of the study area between the Hill Country portion of the Trinity Aquifer and the Edwards (Balcones Fault Zone) Aquifer or the confined parts of the Trinity Aquifer underlying the Edwards (Balcones Fault Zone) Aquifer.
- Only the outcrop area of the Hill County portion of the Trinity Aquifer was modeled, and the down-dip extent that underlies the Edwards (Balcones Fault Zone) Aquifer was not included.
- The model was run with MODFLOW-96 (Harbaugh and McDonald, 1996).

TABLE 1. SUMMARIZED INFORMATION FOR THE HICKORY AQUIFER FOR HAYS TRINITY GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Hickory Aquifer	0
Estimated annual volume of water that discharges from the aquifer to springs and any surface-water body including lakes, streams, and rivers	Hickory Aquifer	0
Estimated annual volume of flow into the district within each aquifer in the district	Hickory Aquifer	2,798
Estimated annual volume of flow out of the district within each aquifer in the district	Hickory Aquifer	4,336
Estimated net annual volume of flow between each aquifer in the district	From overlying units into the Hickory Aquifer	1,603
	To underlying units from the Hickory Aquifer	66

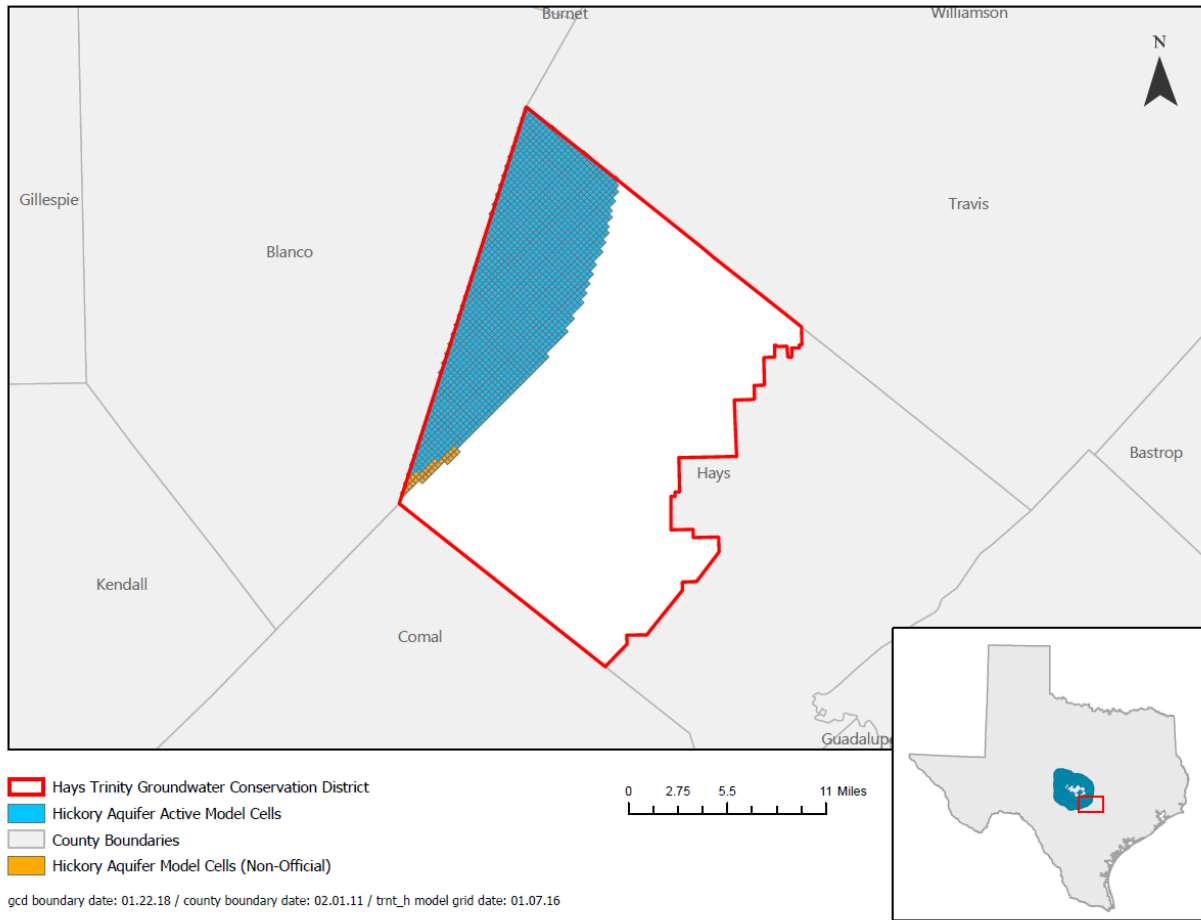


FIGURE 1 AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE HICKORY AQUIFER FROM WHICH THE INFORMATION IN TABLE 2 WAS EXTRACTED (THE HICKORY AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

TABLE 2. SUMMARIZED INFORMATION FOR THE HILL COUNTRY PORTION OF THE TRINITY AQUIFER SYSTEM FOR HAYS TRINITY GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Trinity Aquifer	26,105
Estimated annual volume of water that discharges from the aquifer to springs and any surface-water body including lakes, streams, and rivers	Trinity Aquifer	22,439
Estimated annual volume of flow into the district within each aquifer in the district	Trinity Aquifer	17,716
Estimated annual volume of flow out of the district within each aquifer in the district	Trinity Aquifer	11,610
*Estimated net annual volume of flow between each aquifer in the district	From the Trinity Aquifer to the Edwards (Balcones Fault Zone) Aquifer	7,440

* in the Hays Trinity Groundwater Conservation District, groundwater generally flows east from the Trinity Aquifer to the Edwards (Balcones Fault Zone) Aquifer and the confined parts of the Trinity Aquifer that underlie the Edwards (Balcones Fault Zone) Aquifer.

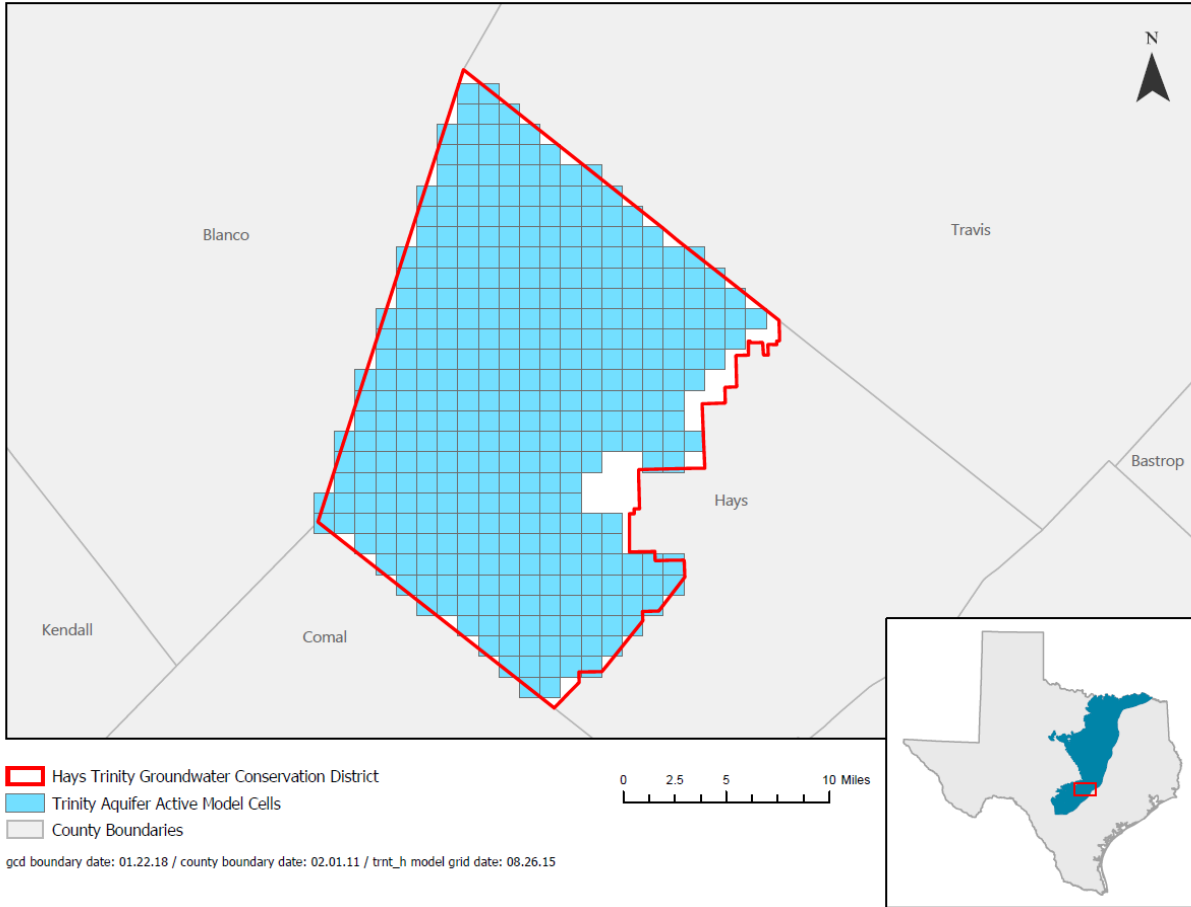


FIGURE 2 AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE HILL COUNTRY PORTION OF THE TRINITY AQUIFER SYSTEM FROM WHICH THE INFORMATION IN TABLE 1 WAS EXTRACTED (THE TRINITY AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

LIMITATIONS:

The groundwater models used in completing this analysis are the best available scientific tools that can be used to meet the stated objectives. To the extent that this analysis will be used for planning purposes and/or regulatory purposes related to pumping in the past and into the future, it is important to recognize the assumptions and limitations associated with the use of the results. In reviewing the use of models in environmental regulatory decision making, the National Research Council (2007) noted:

“Models will always be constrained by computational limitations, assumptions, and knowledge gaps. They can best be viewed as tools to help inform decisions rather than as machines to generate truth or make decisions. Scientific advances will never make it possible to build a perfect model that accounts for every aspect of reality or to prove that a given model is correct in all respects for a particular regulatory application. These characteristics make evaluation of a regulatory model more complex than solely a comparison of measurement data with model results.”

A key aspect of using the groundwater model to evaluate historical groundwater flow conditions includes the assumptions about the location in the aquifer where historical pumping was placed. Understanding the amount and location of historical pumping is as important as evaluating the volume of groundwater flow into and out of the district, between aquifers within the district (as applicable), interactions with surface water (as applicable), recharge to the aquifer system (as applicable), and other metrics that describe the impacts of that pumping. In addition, assumptions regarding precipitation, recharge, and interaction with streams are specific to particular historical time periods.

Because the application of the groundwater models was designed to address regional-scale questions, the results are most effective on a regional scale. The TWDB makes no warranties or representations related to the actual conditions of any aquifer at a particular location or at a particular time.

It is important for groundwater conservation districts to monitor groundwater pumping and overall conditions of the aquifer. Because of the limitations of the groundwater model and the assumptions in this analysis, it is important that the groundwater conservation districts work with the TWDB to refine this analysis in the future given the reality of how the aquifer responds to the actual amount and location of pumping now and in the future. Historical precipitation patterns also need to be placed in context as future climatic conditions, such as dry and wet year precipitation patterns, may differ and affect groundwater flow conditions.

REFERENCES:

- Harbaugh, A. W., 2009, Zonebudget Version 3.01, A computer program for computing subregional water budgets for MODFLOW ground-water flow models, U.S. Geological Survey Groundwater Software.
- Harbaugh, A. W., and McDonald, M. G., 1996, User's documentation for MODFLOW-96, an update to the U.S. Geological Survey modular finite-difference groundwater-water flow model: U.S. Geological Survey Open-File Report 96-485, 56 p.
- Jones, I. C., Anaya, R., and Wade, S. C., 2011, Groundwater availability model: Hill Country portion of the Trinity Aquifer of Texas: Texas Water Development Board Report 377, 165 p.
- Jones, I. C., 2015, GAM Run 15-005: Texas Water Development Board, GAM Run 15-005 Report, 10 p., <http://www.twdb.texas.gov/groundwater/docs/GAMruns/GR15-005.pdf>.
- National Research Council, 2007, Models in Environmental Regulatory Decision Making Committee on Models in the Regulatory Decision Process, National Academies Press, Washington D.C., 287 p., http://www.nap.edu/catalog.php?record_id=11972.
- Panday, S., Langevin, C.D., Niswonger, R.G., Ibaraki, M., and Hughes, J.D., 2013, MODFLOW-USG version 1: An unstructured grid version of MODFLOW for simulating groundwater flow and tightly coupled processes using a control volume finite-difference formulation: U.S. Geological Survey Techniques and Methods, book 6, chap. A45, 66 p., <https://pubs.usgs.gov/tm/06/a45/>.
- Shi, J., Boghici, R., Kohlrenken, W., and Hutchison, W.R., 2016a, Conceptual Model Report: Minor Aquifers of the Llano Uplift Region of Texas. Texas Water Development Board Report, 306 p., <http://www.twdb.texas.gov/groundwater/models/gam/llano/Llano Uplift Conceptual Model Report Final.pdf>.
- Shi, J., Boghici, R., Kohlrenken, W., and Hutchison, W.R., 2016b, Numerical Model Report: Minor Aquifers of the Llano Uplift Region of Texas (Marble Falls, Ellenburger-San Saba, and Hickory). Texas Water Development Board Report, 435 p., <http://www.twdb.texas.gov/groundwater/models/gam/llano/Llano Uplift Numerical Model Report Final.pdf>.
- Texas Water Code, 2011, <http://www.statutes.legis.state.tx.us/docs/WA/pdf/WA.36.pdf>